

TWIN DRIVE - MANUAL

TWIN DRIVE 5.0

BI-FOLDING DOUBLE LEAF
SWING GATE HARDWARE
SPACE-SAVING FEATURE
MAX. 2,5 m SINGLE LEAF
SINGLE LEAF MAX. 110 kg
HINGES NOT INCLUDED

CODE: 1710901

TWIN DRIVE 2.5

BI-FOLDING SINGLE LEAF
SWING GATE HARDWARE
SPACE-SAVING FEATURE
MAX. 2,5 m SINGLE LEAF
SINGLE LEAF MAX. 110 kg
HINGES NOT INCLUDED

CODE: 1710902



NO WELDING
NEEDED



SPACE SAVING
FEATURE
- 50% BACK SPACE



EASY
ASSEMBLING



FAST
NO WELDING



EASY TELESCOPIC
ADJUSTMENT



SUITABLE FOR
ASYMMETRIC LEAFS
100% + 50%



SUITABLE FOR
ALL STANDARD HINGES
WITH SINGLE AXEL



WIND RESISTANCE
MAX. 50%
LEAF CLOSURE



SUITABLE FOR
ALL STANDARD
SWING GATE
OPERATORS



- 37°C
TESTED & PROVEN



+ 50°C
TESTED & PROVEN



BOTTOM FIXED LEAF
SAFETY FEATURE



COMPACT
PACKAGE



EASY
TRANSPORT



FOR RESIDENTIAL
USE ONLY



TAKE
AWAY



HIGH QUALITY
GUARANTEED







CAIS
INNOVATION




90° MAX. ANGLE





L max.	A	B	C min. / max.	D min. / max.	E	F	G
mm							
2500	130	90	850 – 1250	300 – 1250	100	250	40

Valid for gate frame 60x40

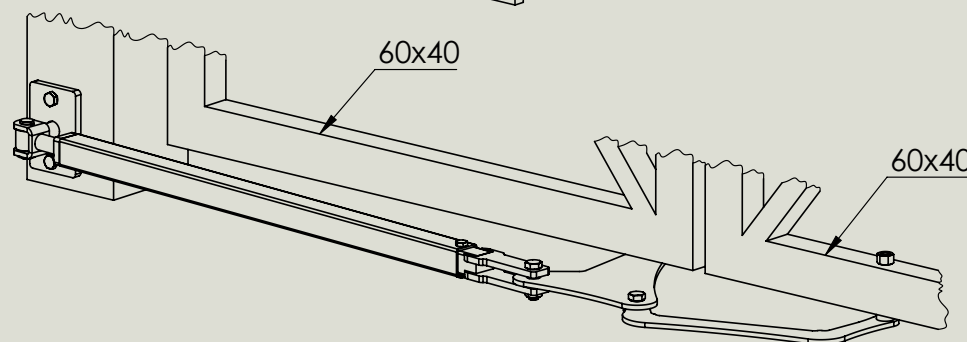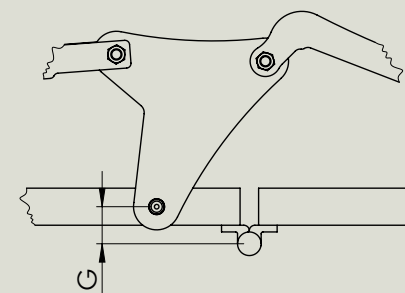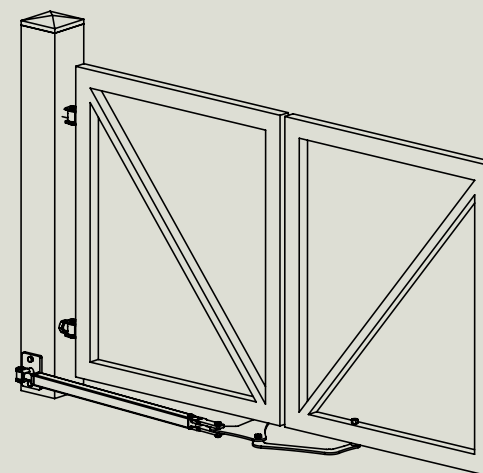
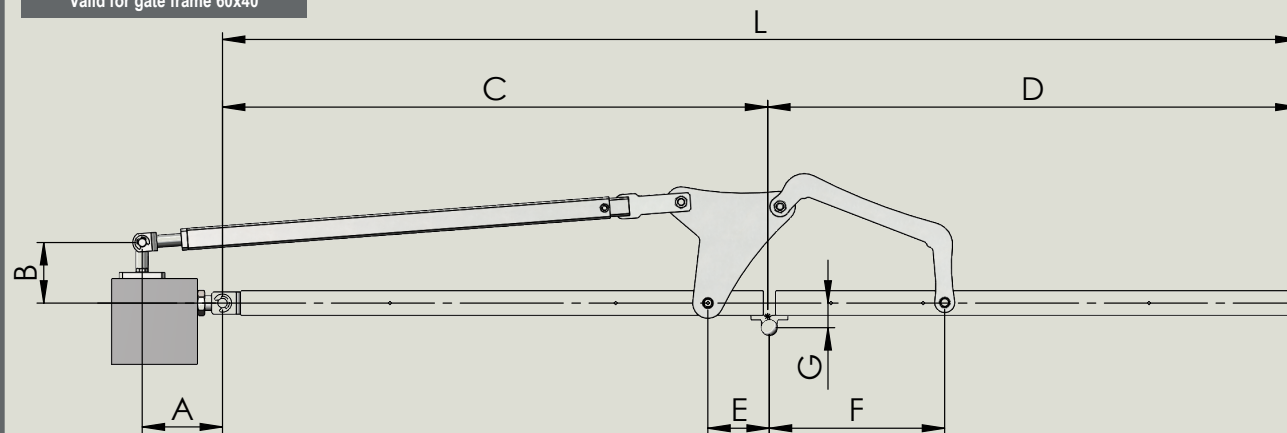


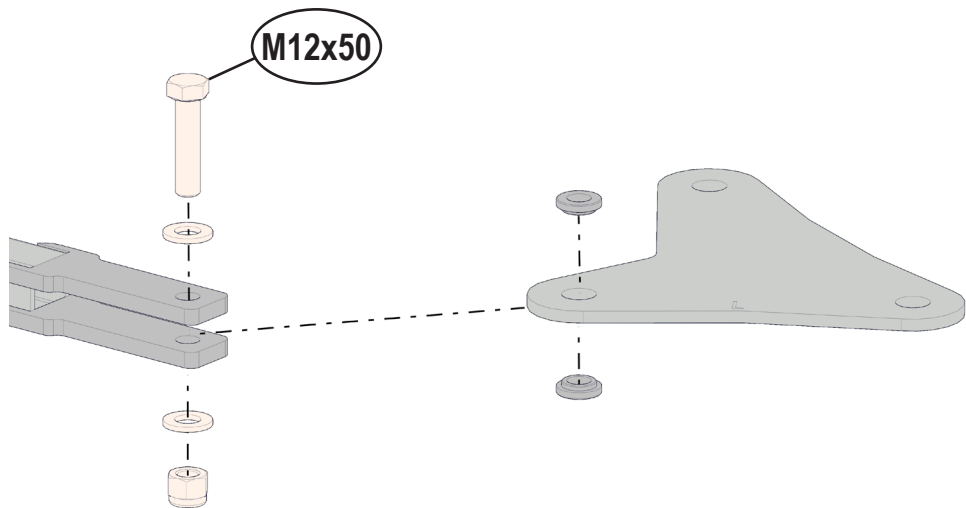




LEFT <<<

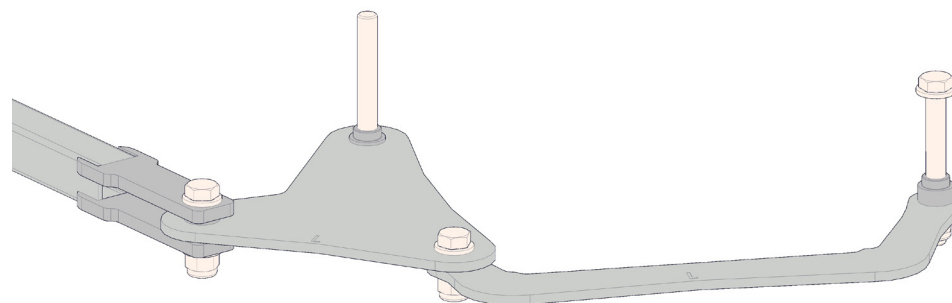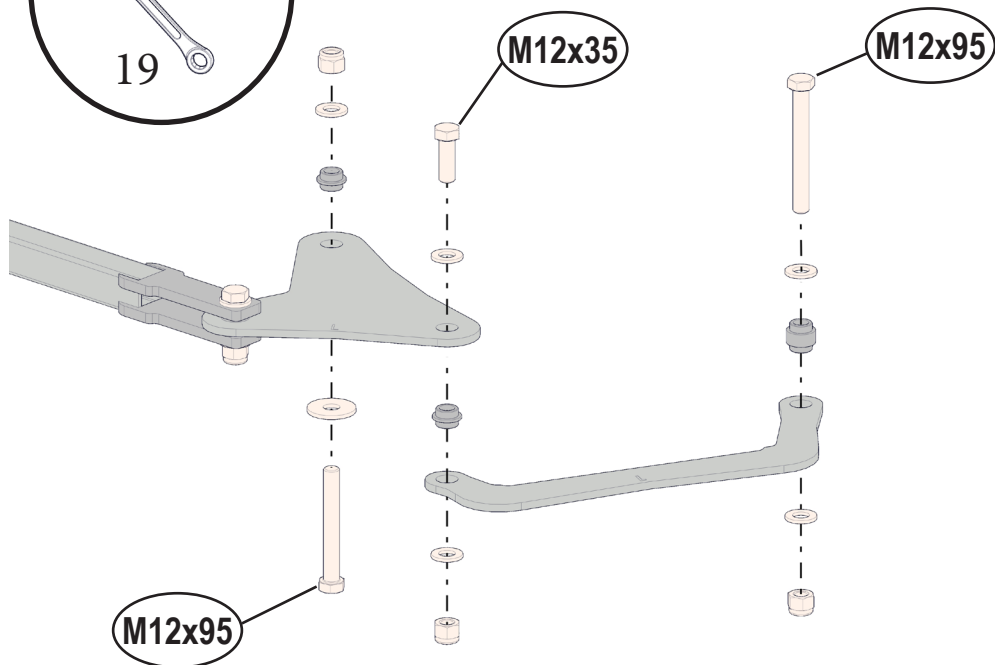
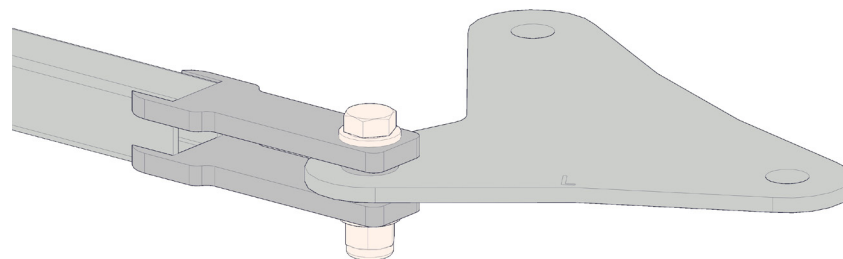





STEP 1 (A) - LEFT



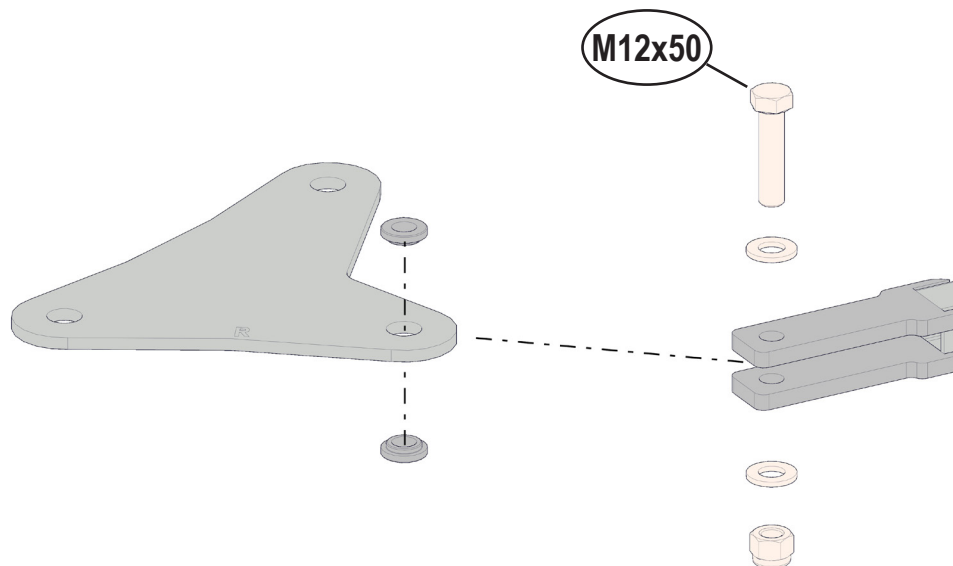






RIGHT >>>

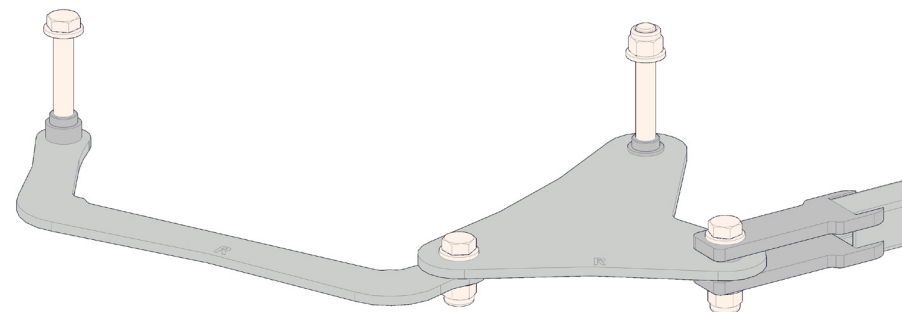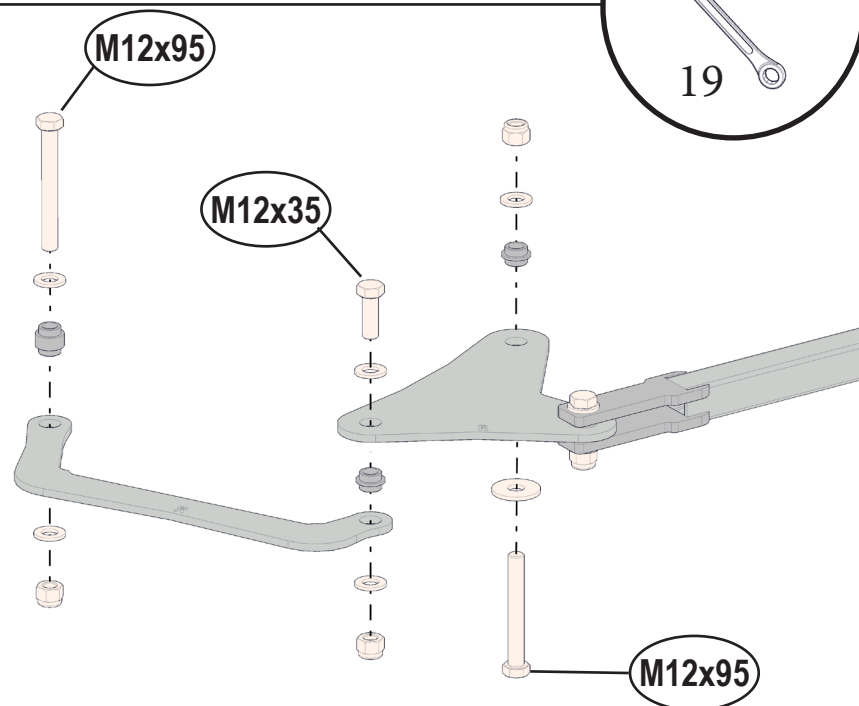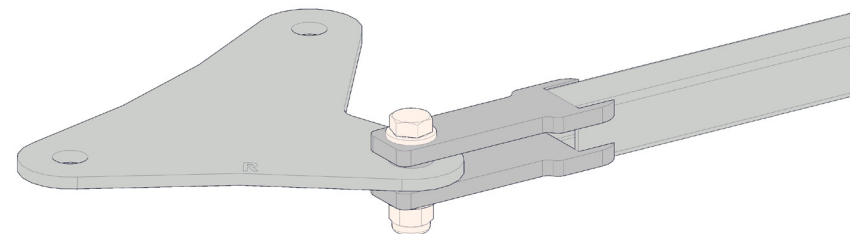


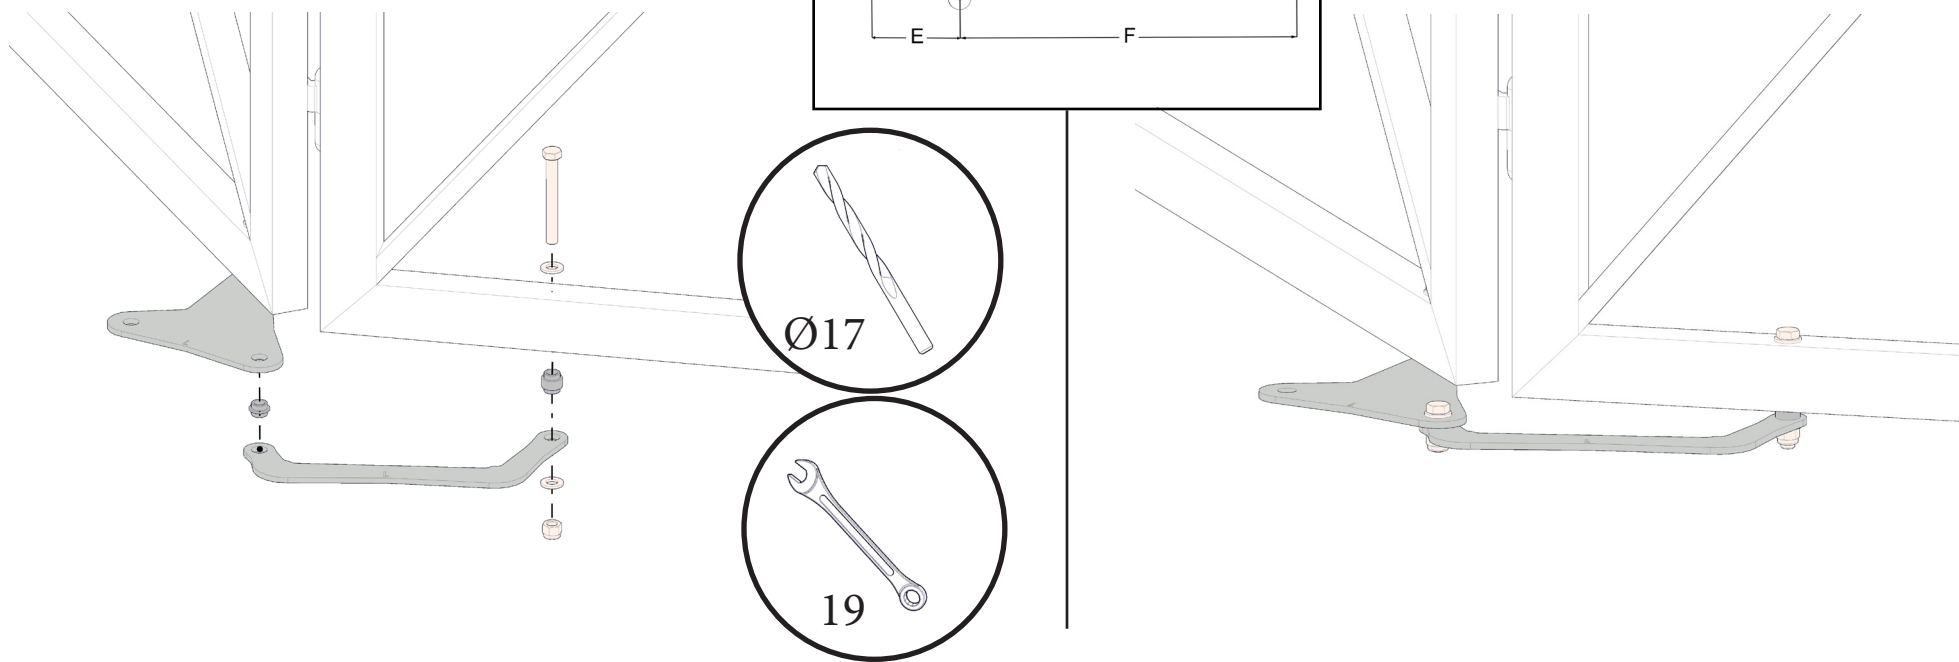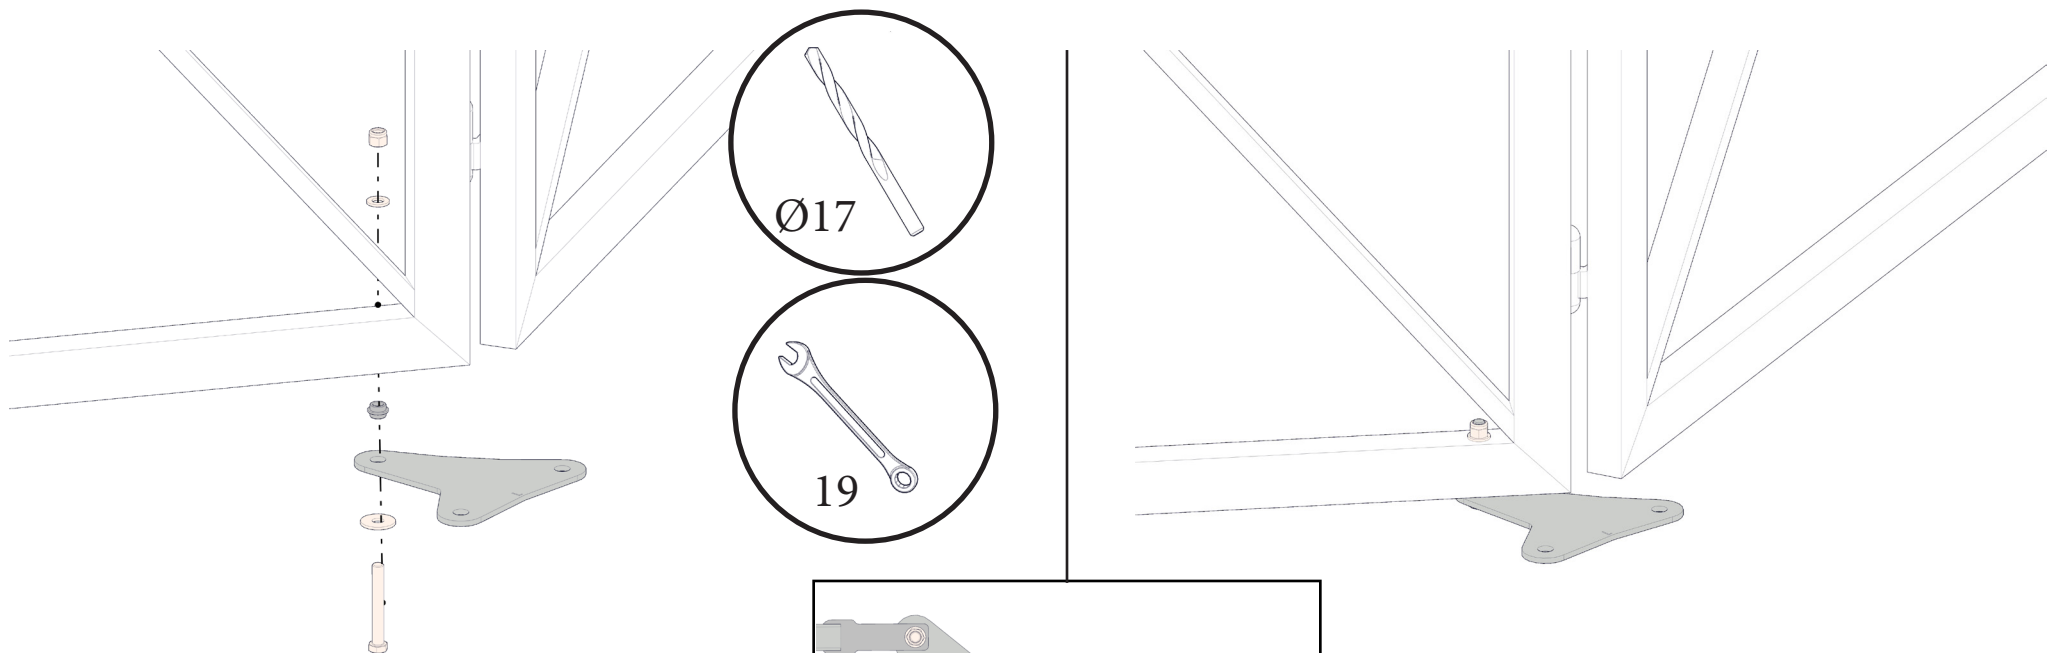

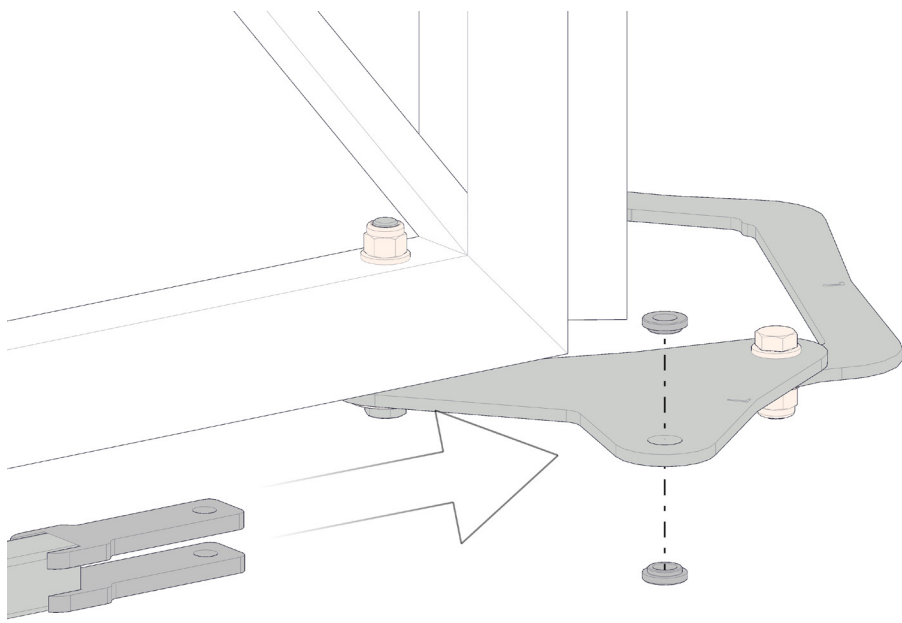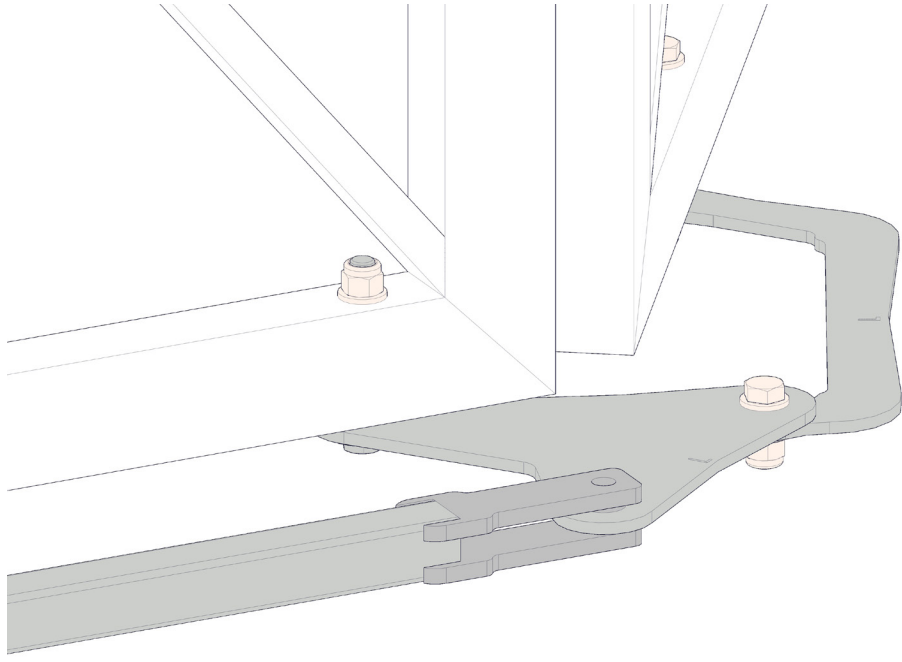
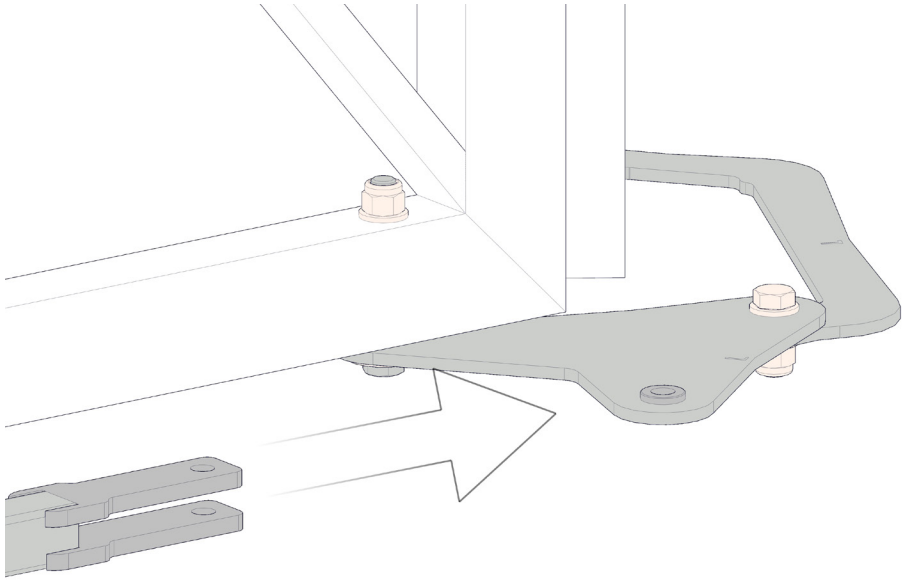


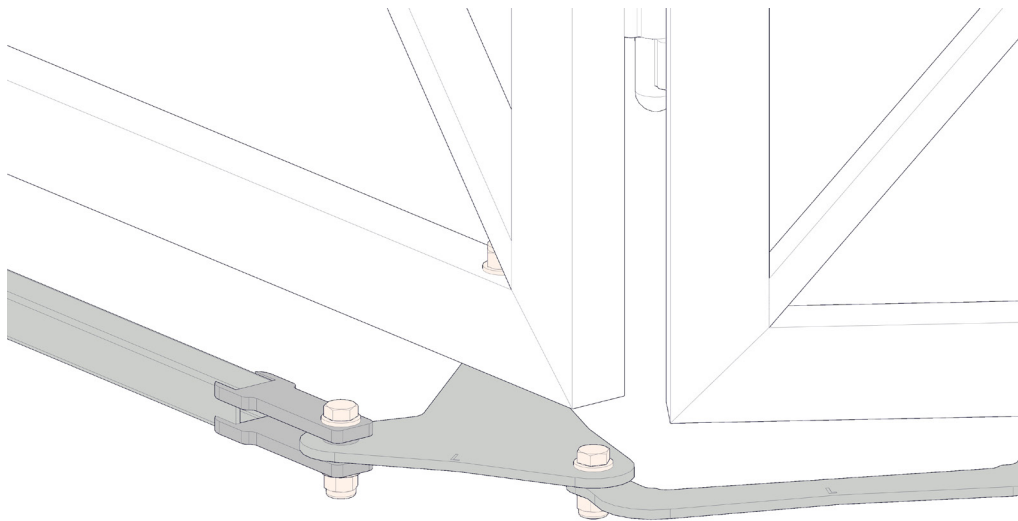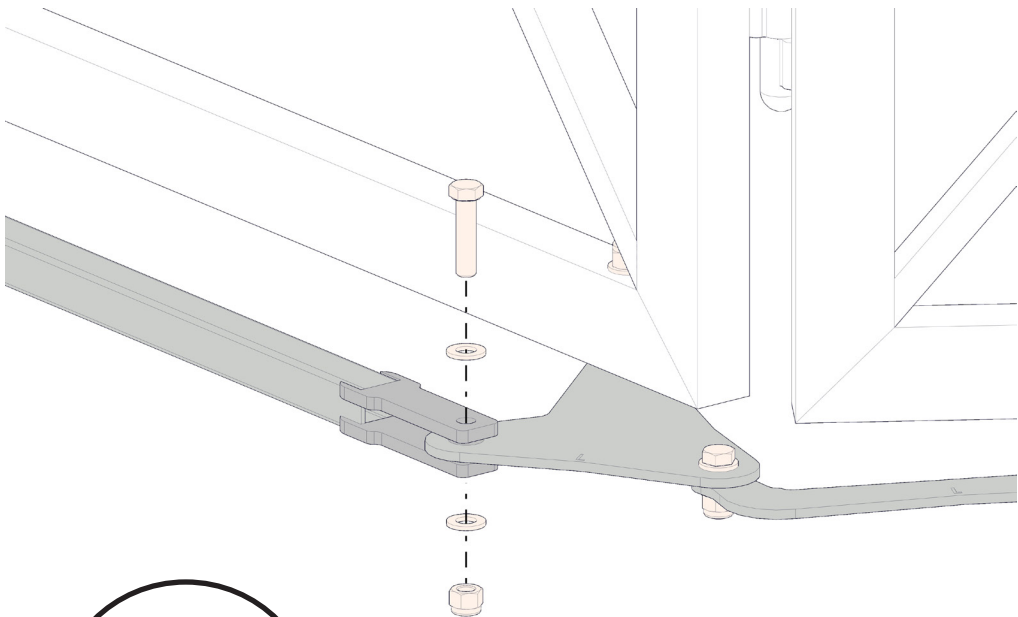

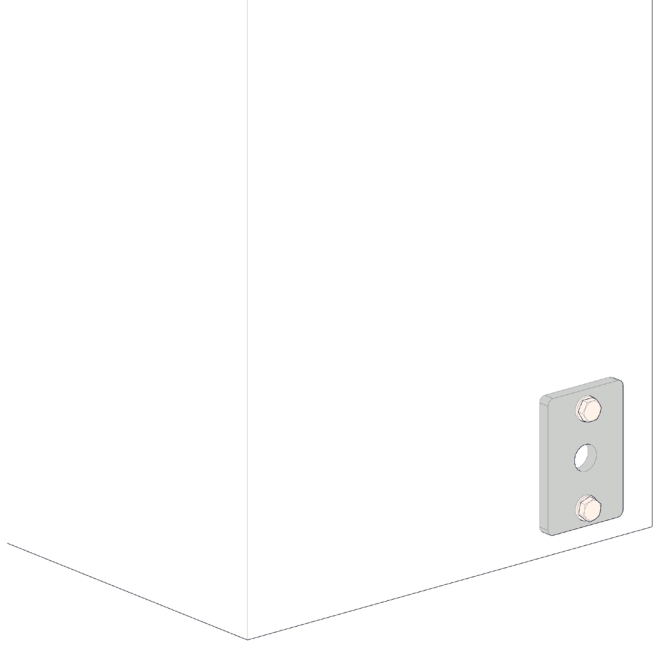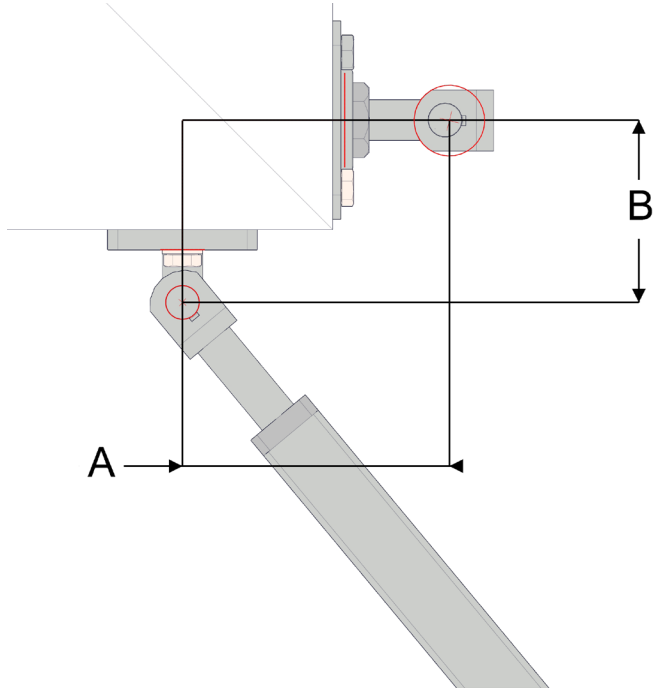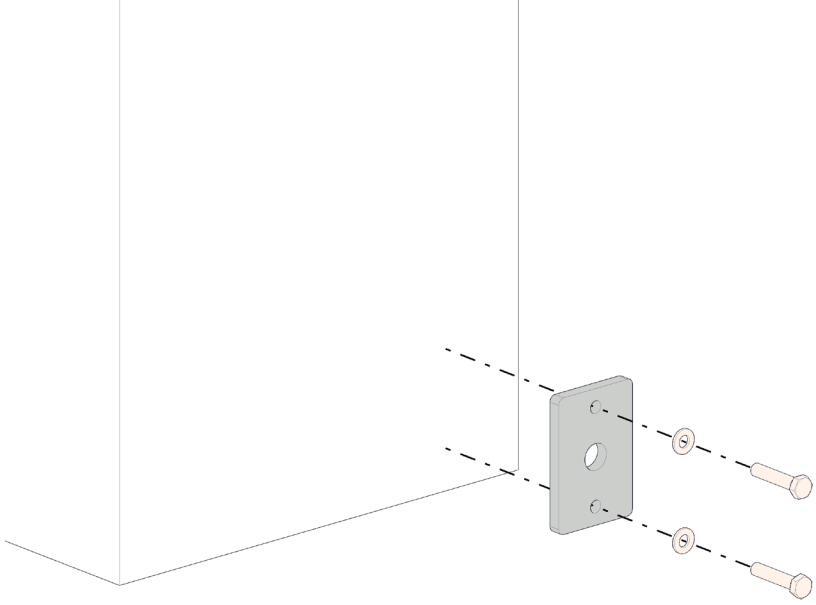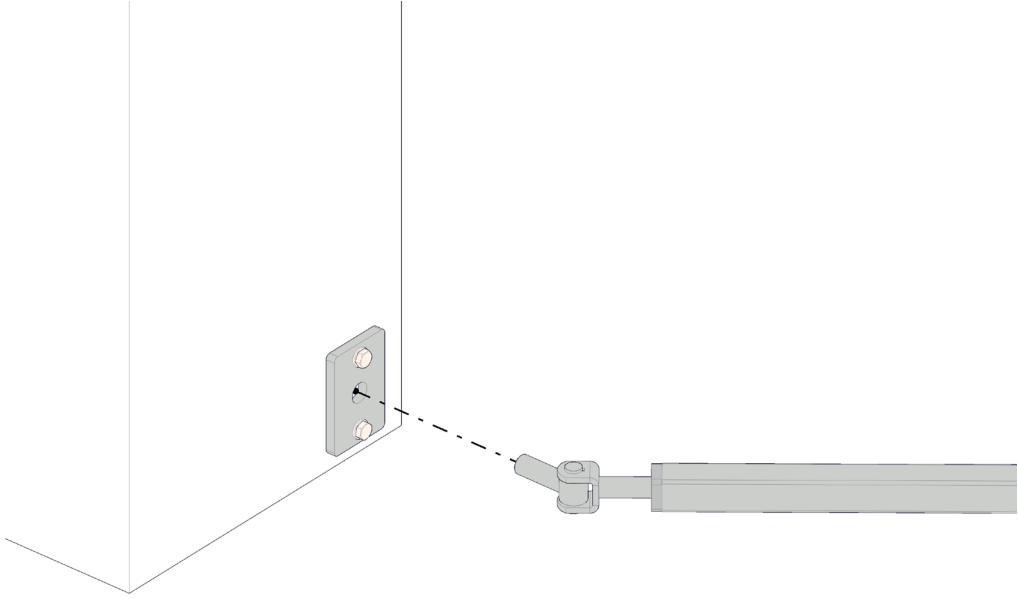


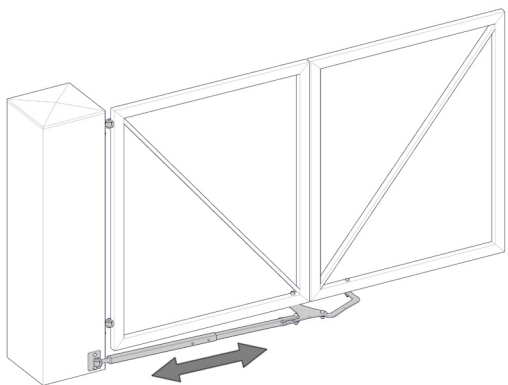



CLOSE

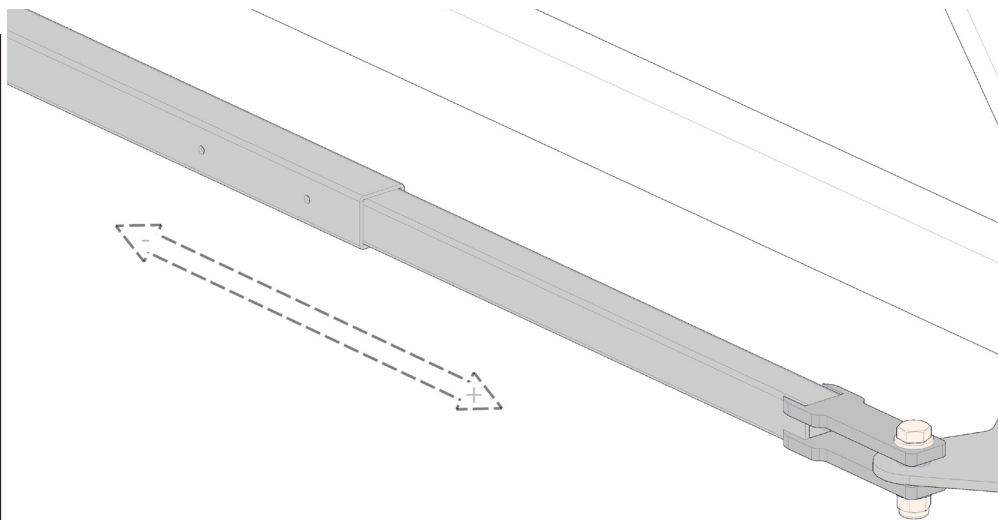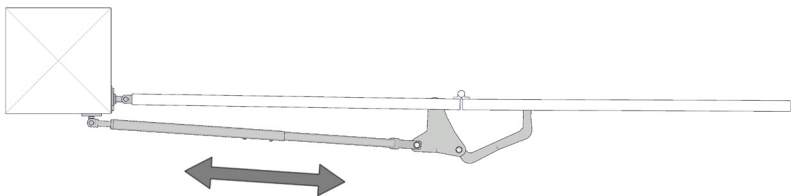

STEP 7

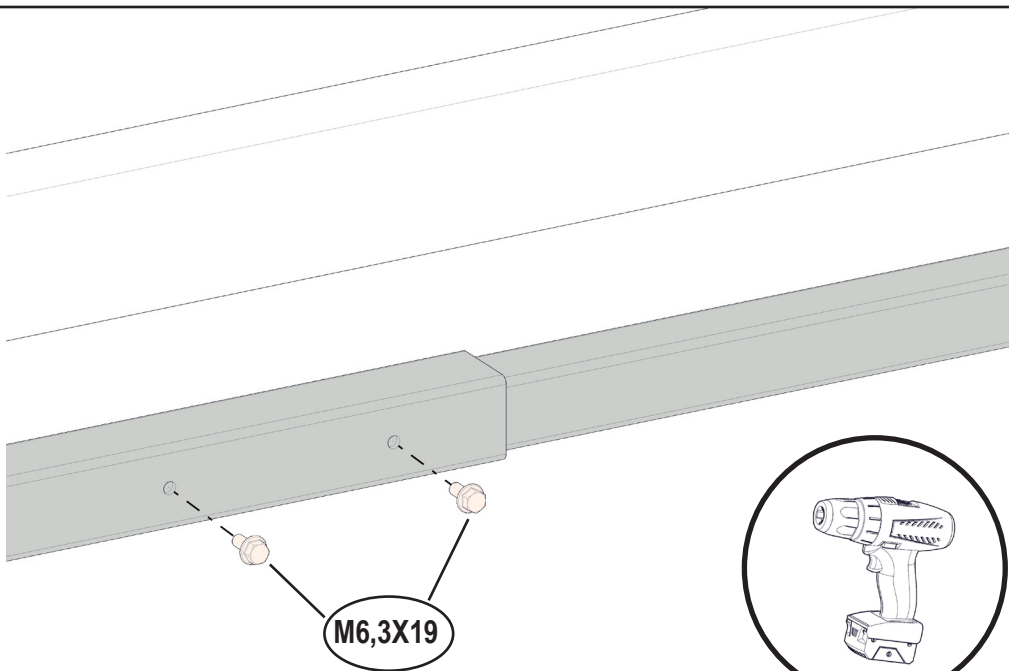

M6,3X19

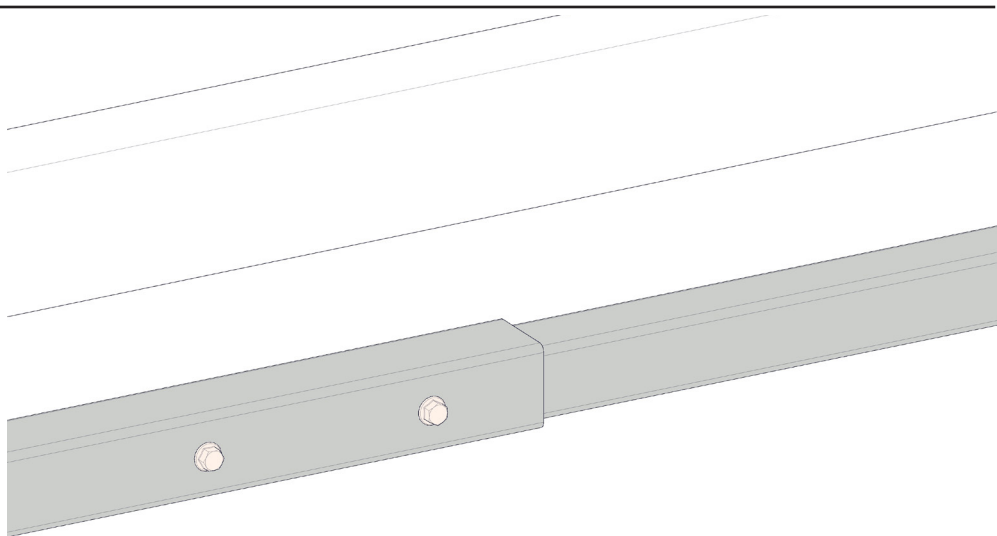

STEP 8

